

**Plate-to-Air Thermoelectric Assembly**

DA-65-24

**Specifications:**

Cooling Power $Q_{cmax}$ (W)	63
Running Current (A)	2.8
Nominal Voltage (V)	24
Max Voltage (V)	27
Power Input (W)	67
Operating Temperature ( $^{\circ}C$ )	-10 to 50
Weight (kg)	1.0
MTBF (fans-hrs)	50,000
Performance Tolerance	$\pm 10\%$



**Features**


- Compact design
- Precise temperature control
- Reliable solid-state operation
- DC operation
- RoHS compliant

**Applications**



- Analytical instrumentation
- Medical diagnostics
- Photonics laser systems
- Industrial instrumentation
- Food and beverage cooling





All products are manufactured in an ISO 9001:2008 & ISO/TS 16949:2009 certified facility and are designed to meet the cooling needs of many thermal management applications in the medical, analytical, industrial and telecom markets.

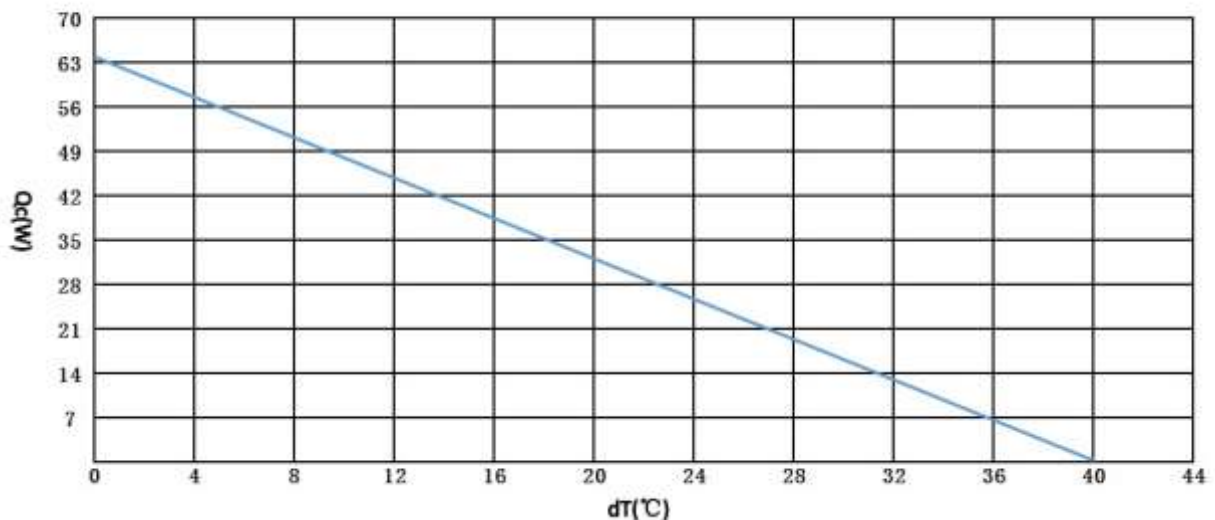**Performance Curve**

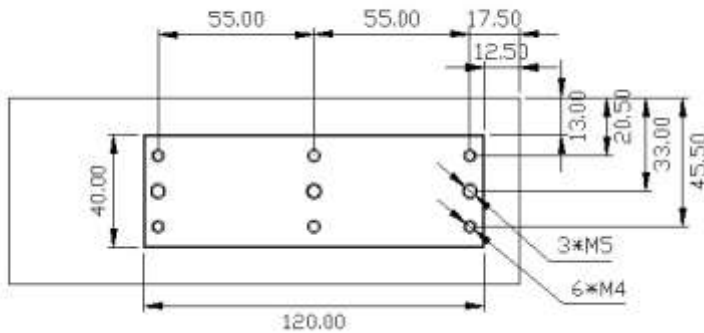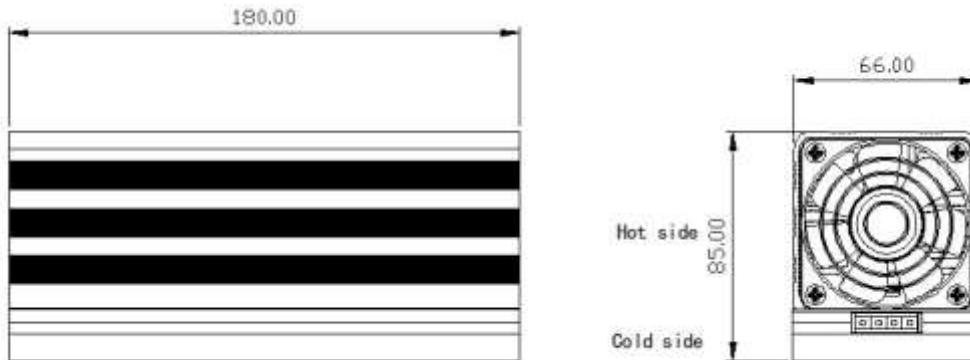

Mechanical Drawing



Electrical connections	
	"TEM+": +TEM
	"TEM-": -TEM
	"F+": +FAN
	"F-": -FAN

Service and Notes manual

**Service:**

Fan impellers and heat sinks must be cleaned on regular intervals to reduce risk for overheating and reduction of cooling function.

**Notes:**

Overheating Thermostat: 75°C ± 5°C on hot side heat sink surface.

**Address:** 5/F Xinfei Building 28<sup>th</sup> Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

**Sales Tel:** +86-592-352 1988

**Fax:** +86-592-352 1989

**Postcode:** 361 101

**Web:** [www.pengnantech.com](http://www.pengnantech.com)