




Thermoelectric Cooler Performance Specifications

TEC1-127090-62X62 W150mm





| Hot Side Temperature(°C) | 25 °C | 50 °C |
|--------------------------|-------|-------|
| Qmax (Watts) | 77.1 | 88 |
| Delta Tmax(°C) | 67 | 75 |
| I _{max} (Amps) | 9 | 9 |
| V _{max} (Volts) | 15.4 | 16.4 |
| Module Resistance(Ohms) | 1.44 | 1.63 |

**Tolerances for thermal and electrical parameters ± 10%.

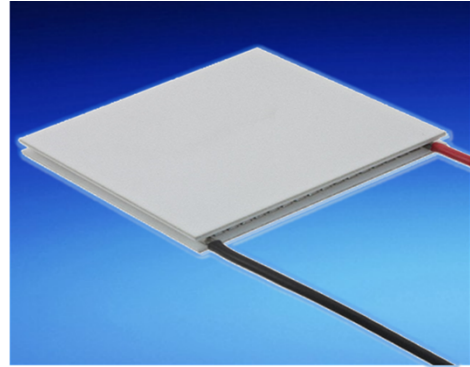


Performance Curves Th=25 °C

Performance Curves Th=50 °C

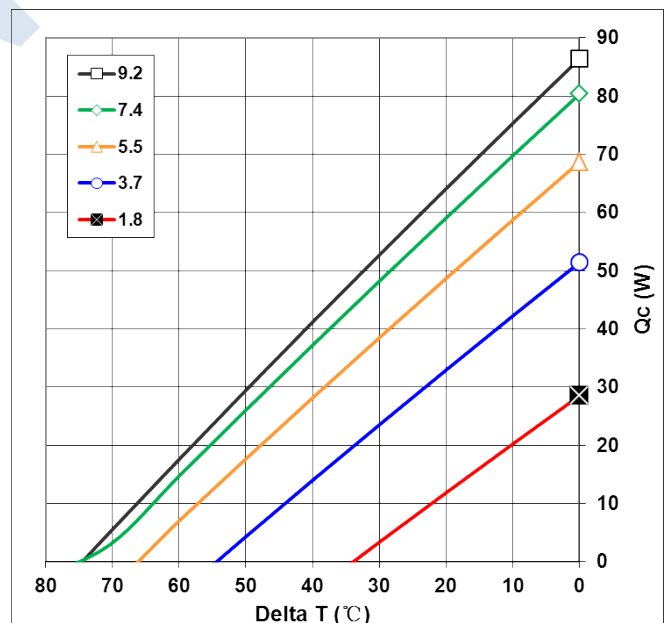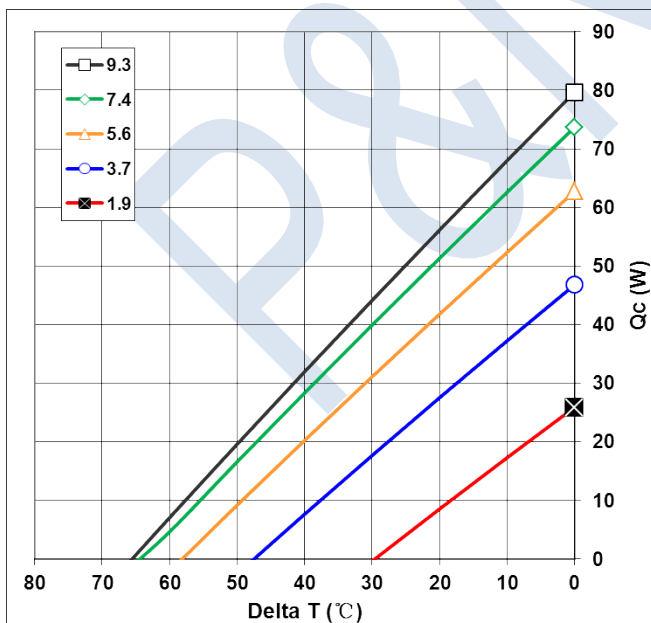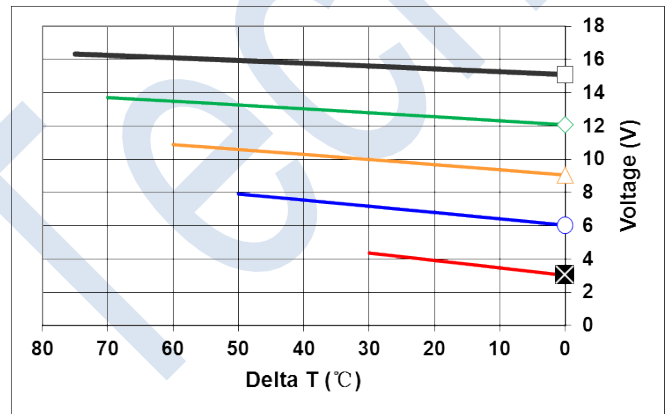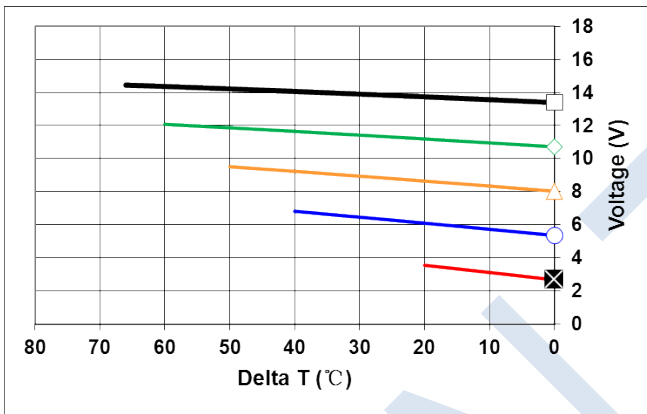

Mechanical Drawing :

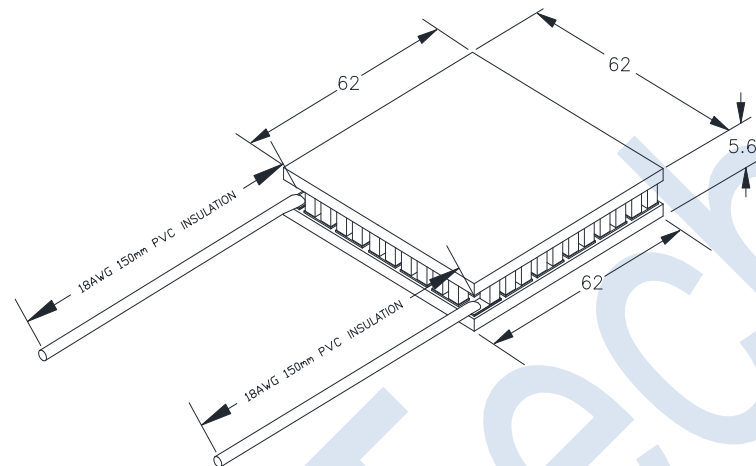

Operation Tips:

- Max Operating Temperature: **90°C**.
- Do not exceed I_{max} or V_{max} when operating module.
- Please consult P&N Technology for moisture and corrosion protection options.

Address: 5/F Xinfeng Building 28th Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

Sales Tel: + 86 - 592 - 352 1988

Fax: +86-592-352 1989

Postcode: 361101

Web: www.pengnantech.com